

## Self Contained Ice Machine 35 kg



Item #:
Project:
Quantity:



#### **FEATURES**

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- Legs are not included and must be ordered separately as an accessory.



AC M 57 **Medium Gourmet** 20 g Ø 30 x H 34 mm



AC S 57

Small Gourmet 8 g
Ø 21 x H 25 mm

## CONDENSING SYSTEM

Air cooled Water cooled

REFRIGERANT GAS

R290

INTERNAL BIN CAPACITY

12 kg

VOLTAGE V/Hz/ph

230/50/1

### **CERTIFICATIONS**







## **OPERATING REQUIREMENTS**

	Minimum	Maximum		
Air temperature	10	43		
Water temperature	5	38		
Water pressure	1 bar (14 psi)	5 bar (70 psi)		
Electrical voltage	-10%	+10%		

#### IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it www.scotsman-ice.com

ACM 57 WS


ACS 57 AS



# **Scotsman**<sup>®</sup>

# Self Contained Ice Machine 35 kg

Item #: Project: Quantity:

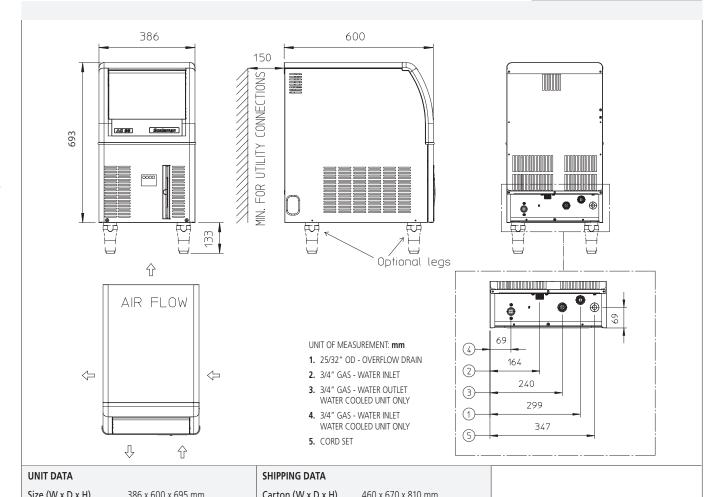

312C (VV X D X 11) 300 X 000 X 033 111111		Carton (W X D X II) 400 X 070 X 010 IIIIII									
Net weight	let weight 36 kg			Weight 43 kg							
24 h ice produc °C Amb. / °C \			3		ergy ption (*)	Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	<b>10°C/10°C</b> kg	21°C/10°C kg	<b>32°C/21°C</b> kg	kWh/ 100 kg	kWh/ 24h	l/h	w	W	No. x Ømm²	А
ACM 57 AS	230/50/1	35	31	25	27.0	6.6	4.0	370	730	1 x 1.5	10

19.7

30.9

5.7

6.8

23.4

300

370

730

730

1 x 1.0

1 x 1.0

10

10

25

22

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions

230/50/1

230/50/1

35

28

31