Self Contained Ice Machine 85 kg

NU 150 XSafe

Scotsman[®]

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 150 Dice 10 g W 22 x D 22 x H 22 mm CONDENSING **SYSTEM**

Air cooled Water cooled



NU H 150 Half Dice 6 g W 10 x D 22 x H 28 mm REFRIGERANT **GAS**

R404A

R452A

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

20 kg



NU L 150 Large Dice 15 g W 28 x D 22 x H 28 mm

CERTIFICATIONS





OPERATING REQUIREMENTS

	Minimum	Maximum		
Air temperature	10	40		
Water temperature	5	35		
Water pressure	1 bar (14 psi)	5 bar (70 psi)		
Electrical voltage	-10%	+10%		

IMPORTANT NOTICE:


Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals. www.scotsman-ice.it www.scotsman-ice.com

NU 150 XSafe

Scotsman® Ice Systems

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:

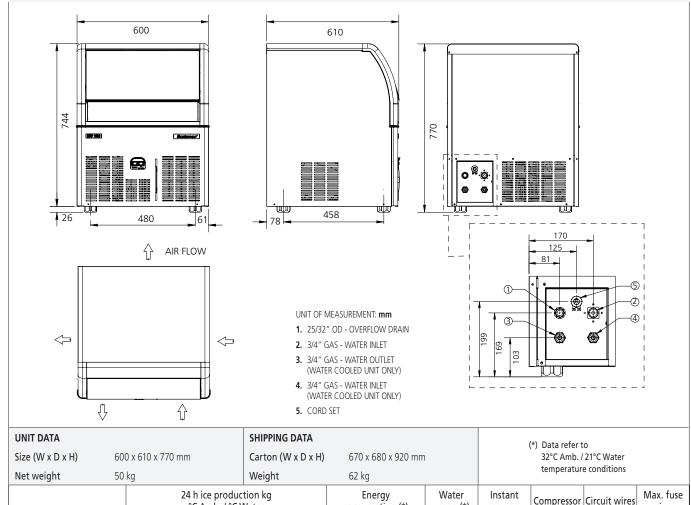

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/					
		kg	kg	kg	100 kg 24h	l/h	W	W	No. x Ømm²	A	
NUH 150 AS	230/50/1	85	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUH 150 WS	230/50/1	85	70	70	10.8	7.6	52.7	500	990	3 x 1.5	10
NUL 150 AS	230/50/1	80	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUL 150 WS	230/50/1	80	70	65	10.8	7.0	48.9	500	990	3 x 1.5	10
NU 150 AS	230/50/1	85	68	48	18.7	9.0	3.3	500	990	3 x 1.5	10
NU 150 WS	230/50/1	85	80	70	10.8	7.6	52.7	500	990	3 x 1.5	10