






# NW 1408 XSafe

## Modular Ice Machine 640 kg

Item #:
Project:
Quantity:

	<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>• Vertical Cube System.</li> <li>• T304 Stainless Steel Panels.</li> <li>• Auto-alert Indicator Lights.</li> <li>• Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.</li> <li>• One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.</li> <li>• Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.</li> <li>• Head only ice maker: requires a separate storage bin to collect the ice produced.</li> <li>• XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean &amp; safe.</li> </ul>																						
	 <p>NW 1408 Dice 10 g W 22 x D 22 x H 22 mm</p>  <p>NW H 1408 Half Dice 6 g W 10 x D 22 x H 28 mm</p>  <p>NW L 1408 Large Dice 15 g W 28 x D 22 x H 28 mm</p>	<p><b>CONDENSING SYSTEM</b></p> <p>Air cooled Remote condenser Water cooled</p>	<p><b>RECOMMENDED BINS</b></p> <table border="1"> <thead> <tr> <th>Head</th> <th colspan="2">Bins</th> <th>kg</th> </tr> </thead> <tbody> <tr> <td rowspan="5">NW 1408</td> <td>✓</td> <td><b>SB530</b></td> <td>243</td> </tr> <tr> <td>CBT48EAMCD CBT48FMCD</td> <td><b>SB948</b></td> <td>406</td> </tr> <tr> <td>CBT52EAMCD</td> <td><b>SB1025</b></td> <td>478</td> </tr> <tr> <td>●</td> <td><b>UBH1100</b></td> <td>553</td> </tr> <tr> <td>●</td> <td><b>UBH1600</b></td> <td>812</td> </tr> </tbody> </table>		Head	Bins		kg	NW 1408	✓	<b>SB530</b>	243	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406	CBT52EAMCD	<b>SB1025</b>	478	●	<b>UBH1100</b>	553	●	<b>UBH1600</b>
Head	Bins		kg																				
NW 1408	✓	<b>SB530</b>	243																				
	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406																				
	CBT52EAMCD	<b>SB1025</b>	478																				
	●	<b>UBH1100</b>	553																				
	●	<b>UBH1600</b>	812																				
<p><b>CERTIFICATIONS</b></p> 	<p><b>REFRIGERANT GAS</b></p> <p>R404A R452A</p>	<p><b>VOLTAGE V/Hz/ph</b></p> <p>230/50/1 230/60/1</p> <p><b>LEGEND:</b>          ✓ : Perfect combination between ice maker and bin          ● : Ice chute cut-out performed upon installation          CBTxxxxxxxx : need additional bin top</p>																					
<p><b>IMPORTANT NOTICE:</b>          Models and specifications are subject to change without notice.          This spec sheet is meant for commercial purpose only.          For technical documentation please refer to our service manuals.</p>	<p><b>OPERATING REQUIREMENTS</b></p> <table border="1"> <thead> <tr> <th></th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>Air temperature</td> <td>10</td> <td>40</td> </tr> <tr> <td>Water temperature</td> <td>5</td> <td>35</td> </tr> <tr> <td>Water pressure</td> <td>1 bar (14 psi)</td> <td>5 bar (70 psi)</td> </tr> <tr> <td>Electrical voltage</td> <td>-10%</td> <td>+10%</td> </tr> </tbody> </table> <p><a href="http://www.scotsman-ice.it">www.scotsman-ice.it</a>  <a href="http://www.scotsman-ice.com">www.scotsman-ice.com</a></p>				Minimum	Maximum	Air temperature	10	40	Water temperature	5	35	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%					
	Minimum	Maximum																					
Air temperature	10	40																					
Water temperature	5	35																					
Water pressure	1 bar (14 psi)	5 bar (70 psi)																					
Electrical voltage	-10%	+10%																					


Modular Ice Machine 640 kg

# NW 1408 *XSafe*

## Modular Ice Machine 640 kg

Item #:
Project:
Quantity:

Modular Ice Machine 640 kg

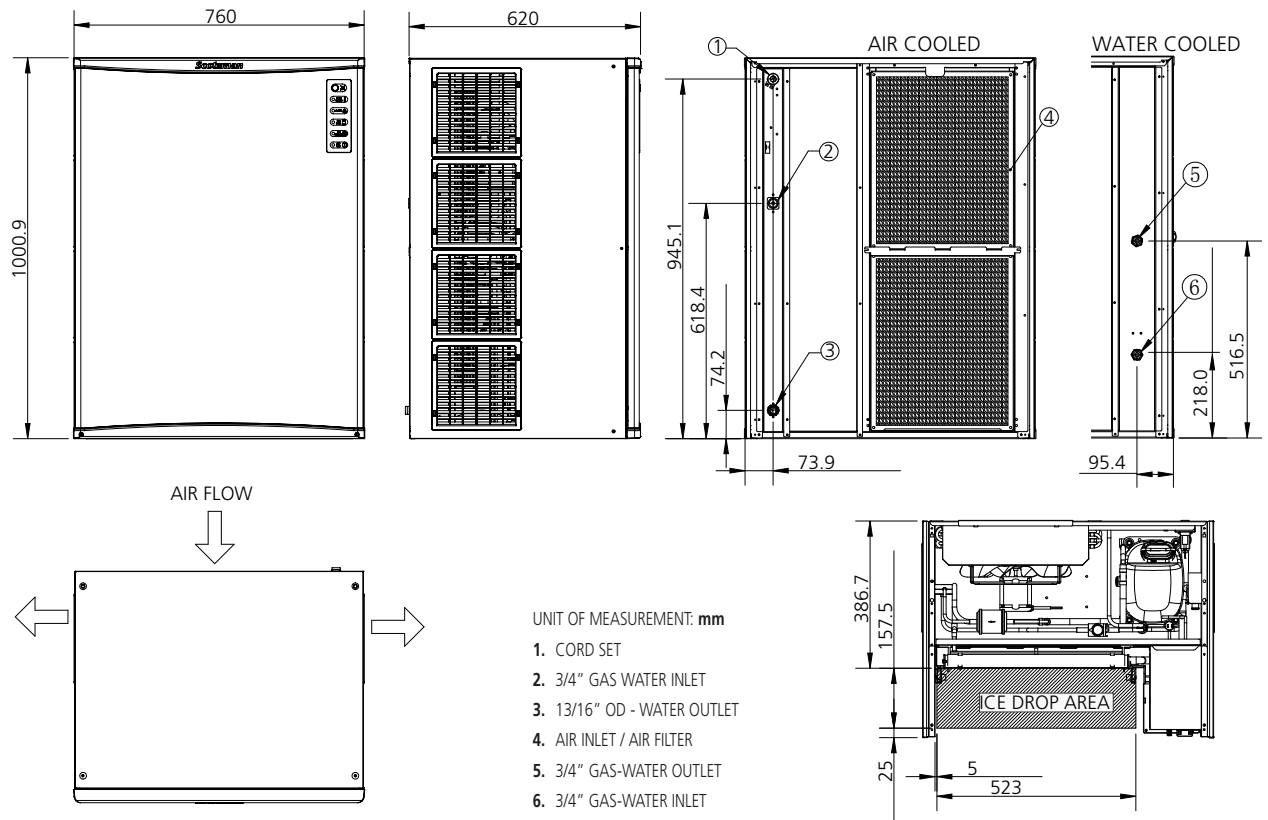

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)		765 x 610 x 1000 mm		Carton (W x D x H)		830 x 690 x 1160 mm					
Net weight		130 kg		Weight		145 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
NWH 1408 AS	230/50/1	660	650	530	10.8	57.2	31.1	3365	10500	3 x 2.5	30
NWH 1408 ASR	230/50/1	680	660	500	10.8	54.0	29.8	3365	10500	3 x 2.5	30
NWH 1408 WS	230/50/1	660	660	590	9.3	54.6	292.6	3365	10500	3 x 2.5	30
NWL 1408 AS	230/50/1	620	600	510	10.4	52.8	27.6	3365	10500	3 x 2.5	30
NWL 1408 WS	230/50/1	620	630	560	8.8	49.4	282.8	3365	10500	3 x 2.5	30
NW 1408 AS	230/50/1	640	630	500	11.2	56.2	26.6	3365	10500	3 x 2.5	30
NW 1408 WS	230/50/1	660	650	580	9.0	52.4	261.0	3365	10500	3 x 2.5	30
NWH 1408 AS	230/60/1	660	641	480	11.2	54.0	32.6	3000	9442	3 x 2.5	30
NWH 1408 ASR	230/60/1	630	580	480	11.7	56.1	25.5	3000	9442	3 x 2.5	30