

Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:


		FEATURES <ul style="list-style-type: none">• Produces individual Gourmet crystal clear supercubes.• Resistant stainless steel exterior.• Front panel in and out airflow (air cooled model only) for built-in installation.• Front access condenser air filter, removable and washable (air cooled model only).• Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.• Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.• PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.• XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
<div><div>EC L 206 Large Gourmet 39 g Ø 38 x H 41 mm</div></div> <div><div>EC M 206 Medium Gourmet 20 g Ø 30 x H 34 mm</div></div> <div><div>EC S 206 Small Gourmet 8 g Ø 21 x H 25 mm</div></div>	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 50 kg	
	REFRIGERANT GAS R404A R452A		
	VOLTAGE V/Hz/ph 230/50/1 230/60/1		
	CERTIFICATIONS         		
		OPERATING REQUIREMENTS	
		Minimum	Maximum
Air temperature		10	43
Water temperature		5	38
Water pressure		1 bar (14 psi)	5 bar (70 psi)
Electrical voltage		-10%	+10%
IMPORTANT NOTICE: Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.		www.scotsman-ice.it www.scotsman-ice.com	

Self Contained Ice Machine 130 kg

EC 206 XSafe

Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:

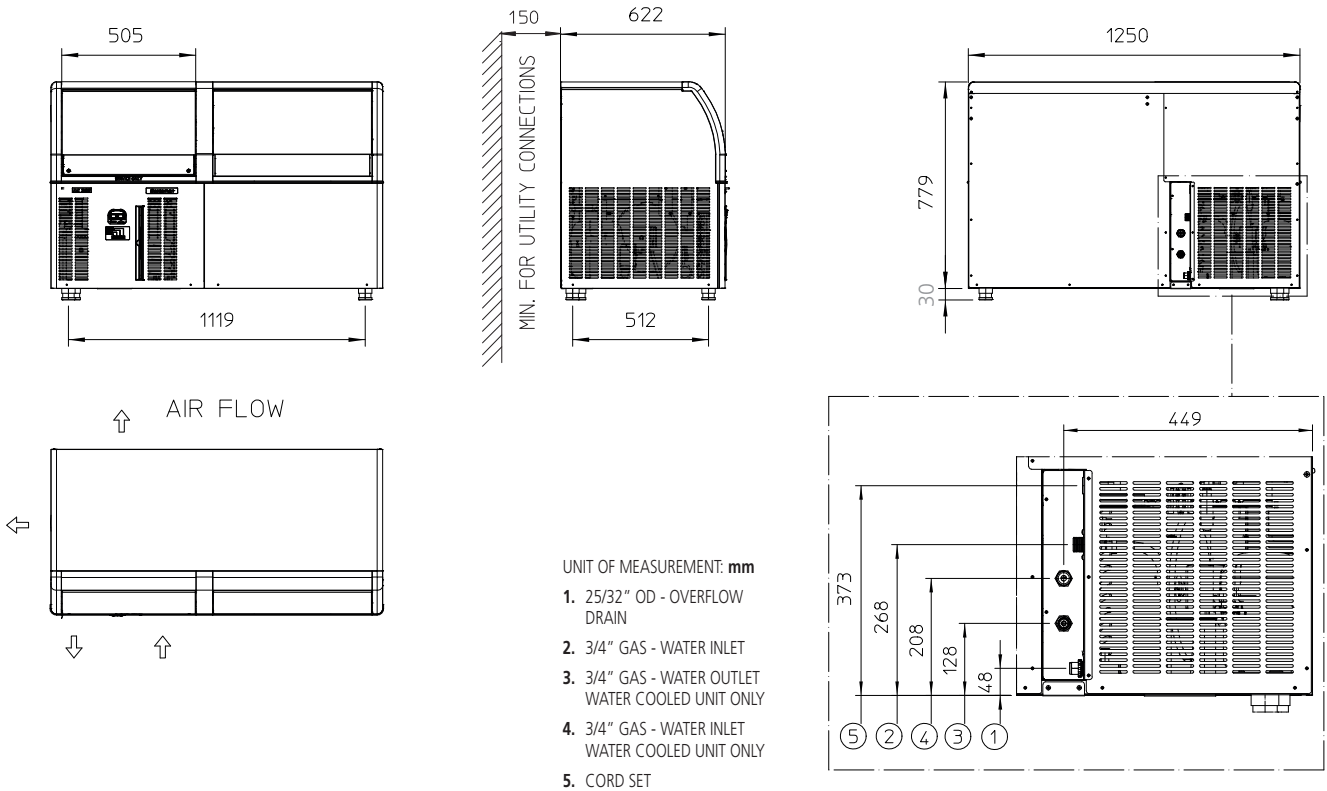

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		1250 x 622 x 809 mm			Carton (W x D x H)		1320 x 690 x 960 mm				
Net weight		84 kg			Weight		97 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ECL 206 AS	230/50/1	126	117	92	21.6	20.5	9.6	950	2100	3 x 1.5	16
ECM 206 AS	230/50/1	130	123	91	19.9	18.1	10.8	850	1770	3 x 1.5	16
ECM 206 WS	230/50/1	128	126	108	14.9	16.1	81.3	760	1770	3 x 1.5	16
ECS 206 AS	230/50/1	100	93	72	29.8	21.3	7.5	950	2100	3 x 1.5	16
ECM 206 AS	230/60/1	141	136	112	19.6	22.0	12.0	1000	2050	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions