Self Contained Ice Machine 32 kg

EC 56 XSafe

Self Contained Ice Machine 32 kg



ltem #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior. Simple and reliable electromechanic controls.
- Front panel in and out airflow (air cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L 56 Large Gourmet 39 g Ø 38 x H 41 mm



EC M 56 **Medium Gourmet** 20 g Ø 30 x H 34 mm



EC S 56 Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled Water cooled

REFRIGERANT GAS

R134a

N134a

VOLTAGE V/Hz/ph

230/50/1 230/60/1

INTERNAL BIN CAPACITY

12 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum		
Air temperature	10	43		
Water temperature	5	38		
Water pressure	1 bar (14 psi)	5 bar (70 psi)		
Electrical voltage	-10%	+10%		

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.


www.scotsman-ice.it www.scotsman-ice.com

EC 56 XSafe

Scotsman® Ice Systems

Self Contained Ice Machine 32 kg

Item #:
Project:
Quantity:

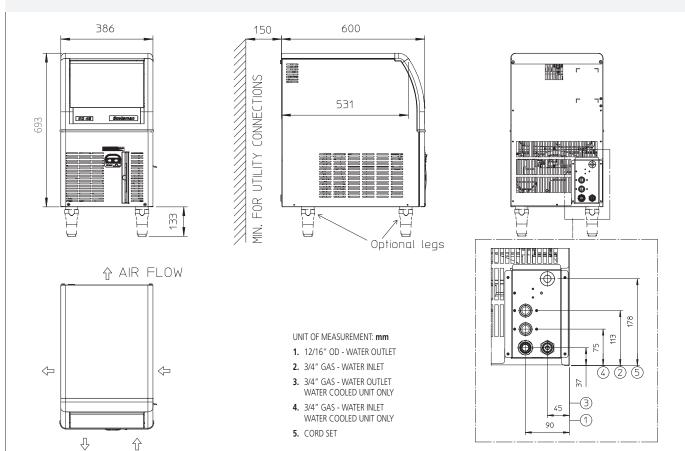

UNIT DATA

Size (W x D x H) 386 x 600 x 695 mm

Net weight 38 kg

SHIPPING DATA

Carton (W x D x H) 460 x 670 x 810 mm

Weight 45 kg

		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version		10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/ kWh/ 100 kg 24h	l/h	w	w	No. x Ømm²	А
	Voltage	kg	kg	kg	100 kg						
ECL 56 AS	230/50/1	31	30	23	33.1	7.6	4.2	400	800	3 x 1.5	10
ECL 56 WS	230/50/1	31	30	23	33.1	7.6	81.2	400	800	3 x 1.5	10
ECM 56 AS	230/50/1	32	31	24	33.0	7.9	3.8	400	800	3 x 1.5	10
ECM 56 WS	230/50/1	33	31	27	26.0	7.0	20.2	400	800	3 x 1.5	10
ECS 56 AS	230/50/1	25	24	19	38.6	7.1	3.1	400	800	3 x 1.5	10
ECL 56 AS	230/60/1	35	34	27	32.3	8.6		470	900	3 x 1.5	10
ECL 56 WS	230/60/1	31	30	23	33.1	7.6	81.2	400	800	3 x 1.5	10
ECM 56 AS	230/60/1	35	34	27	32.3	8.6	20.2	470	900	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions